





Shredders

Vantage heavy duty continuous cut shredders are especially suited for material 'conditioning' prior to baling.





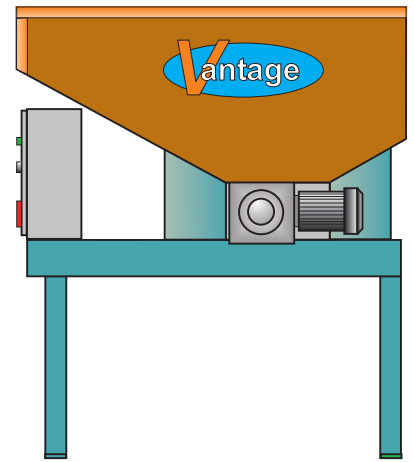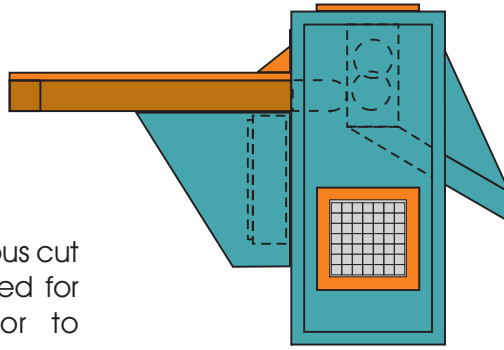

The modular design can be readily configured for shredding a wide range of materials including paper, cardboard, plastics, polyurethane foams and cardboard cores.

This range offers excellent build quality ensuring reliable operation over many years.

All Vantage designs can be customised to match specific applications, please call to discuss.



Features

-  Variety of continuous cut widths
-  High quality tool steel cutters
-  Automatic motor overload protection
-  Stand and Hopper inclusive (subject to size)
-  Quality Components
- 

Specifications	650/10	650/50	1100/75
Continuous cut width	10 mm standard	50 mm standard	75 mm standard
Cutting speed	27 m per minute	27 m per minute	47 m per minute
Cutting chamber length	650 mm	650 mm	1100 mm
Feed height	1500 mm	1500 mm	1200 mm
Throughput (mixed paper)	up to 400 kg/hr*	up to 500 kg/hr*	up to 2000 kg/hr*
Drive Motors	2x3kw shaft mounted	2x3kw shaft mounted	2x11kw flat mounted
Shaft speed	63 rpm	63 rpm	50 rpm
Electrical supply	415v 3ph 50hz	415v 3ph 50hz	415v 3ph 50hz
Overall dimensions	H 1750 mm W 1350 mm D 1500 mm	H 1750 mm W 1350 mm D 1500 mm	H 2000 mm W 1650 mm D 1800 mm

*Dependant on method of feeding

As part of our policy of continuous improvement we reserve the right to change specifications. Throughput figures are provided for guidance only

Engineering solutions to recycling problems

Advantage Engineering Technology Ltd
 Unit 9, Capenhurst Technology Park,
 Capenhurst Lane, Capenhurst, Cheshire CH1 6ES
 Tel No: 0151 339 3830 Fax No: 0151 339 3840